

200MAX

WELDING MACHINE FOR ELECTRODES



DC INVERTER MMA WELDER



INPUT VOLTAGE
220V 50/60Hz



HEAVY DUTY CYCLE 60%




GENERATOR FRIENDLY



PROTECT 440V

TIG MODE
Lift TIG function

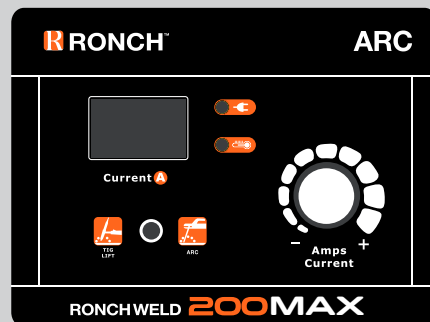

PROTECTION

Equipped with temperature, voltage and current sensor protection systems.

GENERATOR FRIENDLY

Developed to work with diesel generators and prepared to work even with the input voltage spikes.

DIGITAL DISPLAY

Variable amperage control with digital meter, for a simultaneous visualization of the welding current.

PARAMETERS

Model	200MAX	Frequency (Hz)	50/60
Rated Input Power (KW)	6.5	Efficiency (%)	85
Rated Input Current (A)	46	Input Current (V)	1-220/230/240±10%
Duty Cycle (40°C 10min)	60%200A	Electrode Diameter	1.6 - 5.0
	100%155A	Electrode Types	6011, 7018, etc.
Net Weight	13.6lb (6.2kg)	Power Factor	0.7
Dimensions (mm)	370x146x278	Refrigeration	AF
No-load Voltage (V)	68	Insulation Class	H
Current Range (A)	10~200	Protection Class	IP23